


Reception Desk Cladding with Secret Fixings for Interior Applications

RD1 – Double Folded Trays with GA Ver T Fix System

Made to Measure Panels: It's so easy, you only need to provide the order checklist information and we'll do the rest!

Order checklist

- Product ref – RD1
- Panel sizes – Height and width (18mm o/a return unless otherwise specified)
- GA sheet code or special pattern details (2mm thick material)
- Plain border margin dimensions (if not minimal)
- Number of panels
- Surface finish – Anodised, satin brushed, powder coated, mill

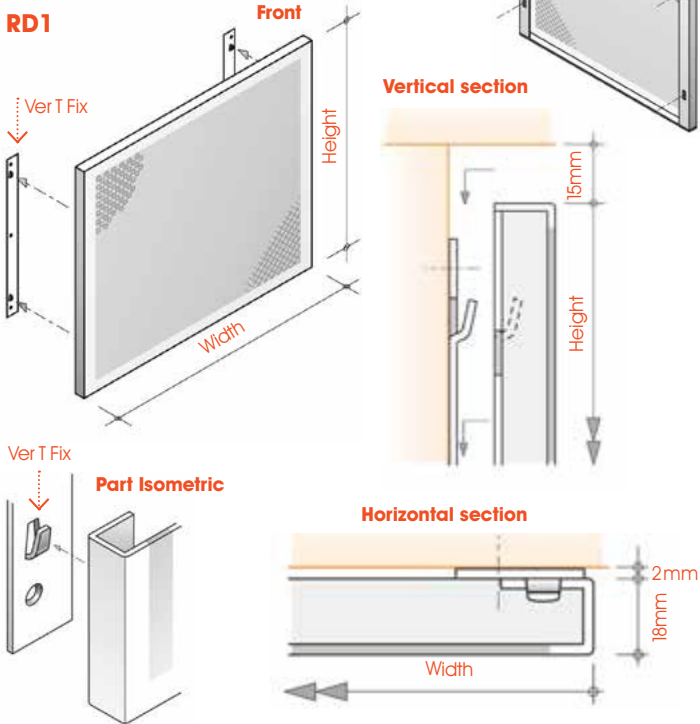

GA Ver T Fix:	Independent test results
Wind Load Positive Pressure	FP* = 3.23kPa (equates to wind speed of 162mph)
Wind Load Negative Pressure	FP* = 0.65kPa (equates to wind speed of 72mph)

The above results show Ver T Fix performance levels comfortably exceeding any internal air pressures that are likely to be encountered in buildings. Refer to www.goodingalum.com for details. FP* = Failure pressure

Call the GA Helpline
Monday-Friday /
8.30am-5.00pm
020 8692 2255
www.goodingalum.com

“ GA was a brand that could be relied upon ”

Cranfield University School of Management, Research Study




Freeman Hospital, Newcastle

RD2 – Double Folded Trays with GA Ver T Fix and Shadow Gaps

Made to Measure Panels: It's so easy, you only need to provide the order checklist information and we'll do the rest!

Order checklist

- Product ref – RD2
- Panel sizes – Height and width (18mm o/a return unless otherwise specified)
- GA sheet code or special pattern details (2mm thick material)
- Plain border margin dimensions (if not minimal)
- Number of panels
- Surface finish for panels and Ver T Fix (if different) – Anodised, satin brushed, powder coated, mill

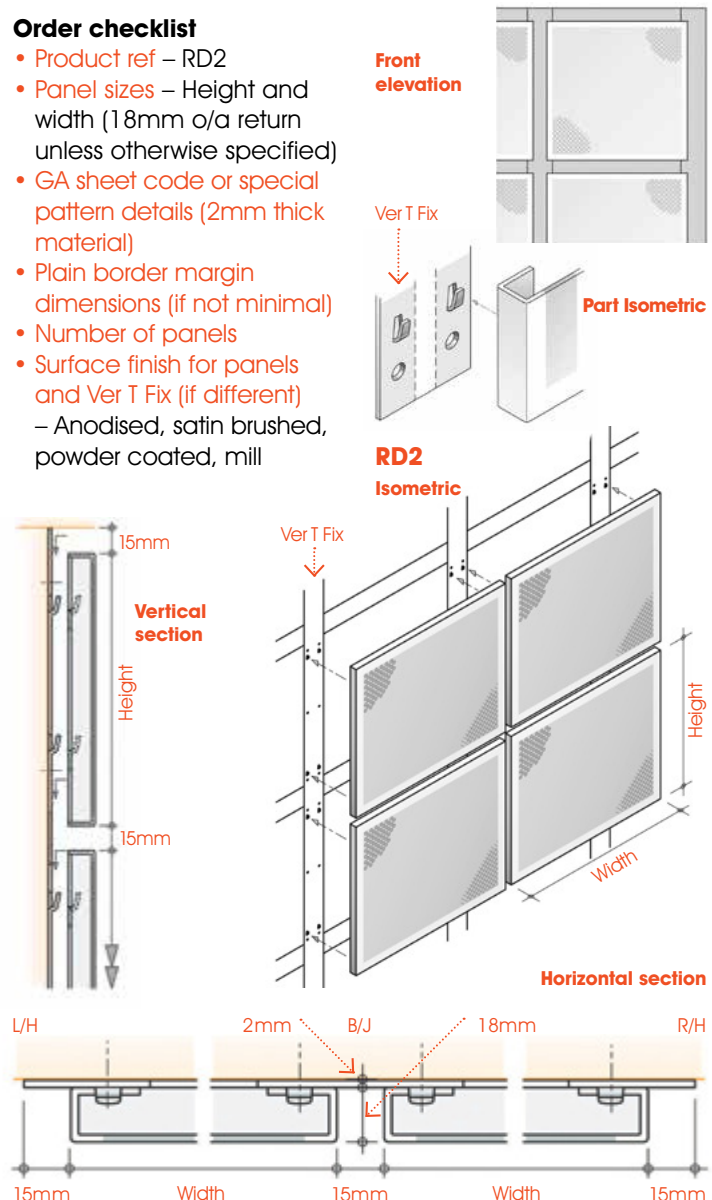



Reception Desk Cladding with Secret Fixings for Interior Applications

RD3 – Single Folded Trays with GA Panel-Fix

Made to Measure Panels: It's so easy, you only need to provide the order checklist information and we'll do the rest!

Order checklist

- Product ref – RD3
- Panel sizes – Height and width (18mm i/s return unless otherwise specified)
- GA sheet code or special pattern details
- Plain border margin dimensions – if Patterned sheet
- Number of panels
- Surface finish – Anodised, satin brushed, powder coated, mill
- Number of GA WP1 horizontal fixing pairs (minimum 2)

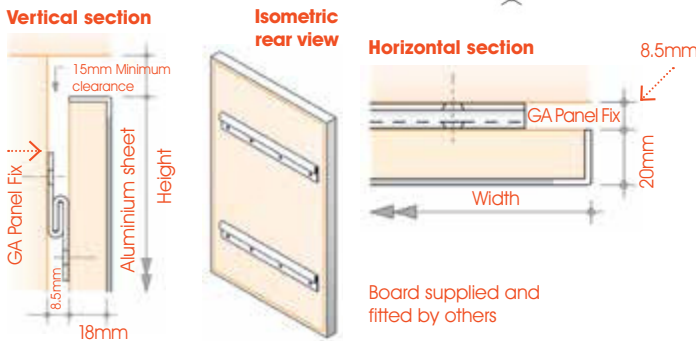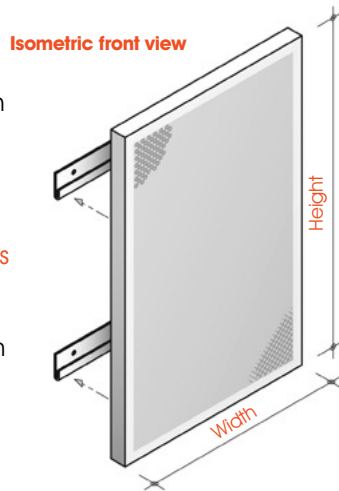


RD4 – Panels with GA Posi-Grip Instant Access Framing

Made to Measure Panels: It's so easy, you only need to provide the order checklist information and we'll do the rest!

Order checklist

- Product ref – RD4
- GA Posi-Grip code
- GA sheet code or special pattern details
- Panel sizes, height and width
- Number of panels
- Surface finish – Anodised, satin brushed, powder coated, mill

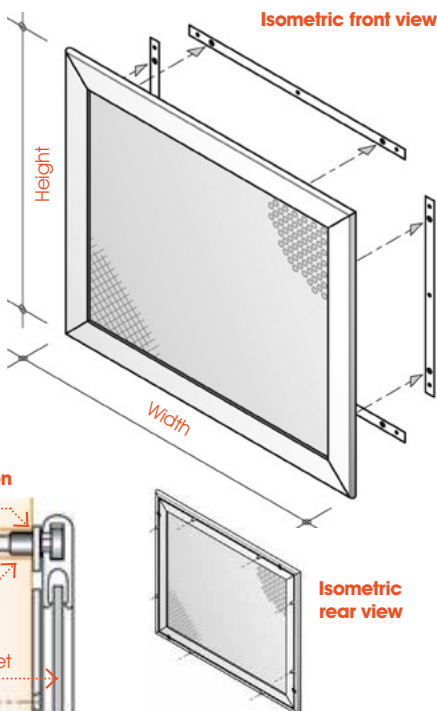



Carrington House, London: GA Posi-Grip 'Instant Access' with perforated sheet

RD5 – Panels with GA Posi-Grip Instant Access Framing and Spacers

Made to Measure Panels: It's so easy, you only need to provide the order checklist information and we'll do the rest!

Order checklist

- Product ref – RD5
- GA Posi-Grip code
- GA sheet code or special pattern details
- Panel sizes, height and width
- Number of panels
- Surface finish – Anodised, satin brushed, powder coated, mill
- Spacer code: SP13, SP16, SP20

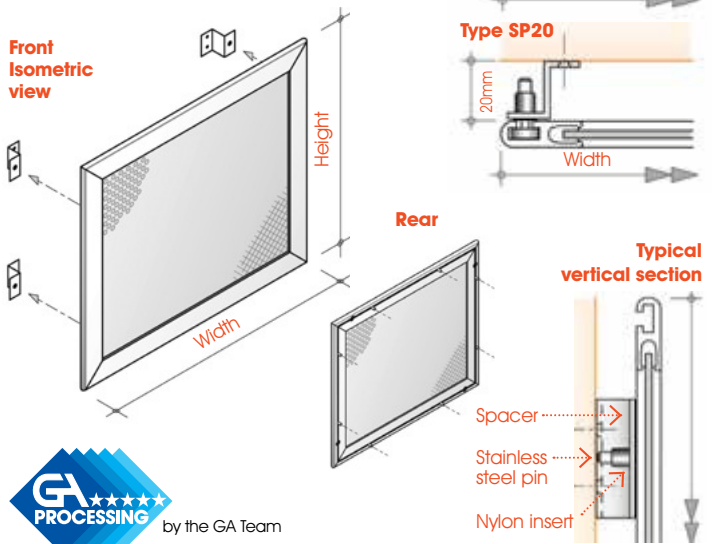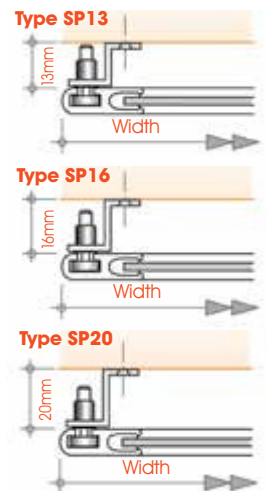

GA Posi-Grip Instant Access:

Wind Load Positive Pressure

Independent test results

FP* = 15.00kPa
(equates to wind speed of 350mph)

Wind Load Negative Pressure

FP* = 1.48kPa
(equates to wind speed of 107mph)

The above results show Posi-Grip Instant Access performance levels comfortably exceeding any internal air pressures that are likely to be encountered in buildings. Refer to www.goodingalum.com for details. FP* = Failure pressure