## Fixing Instructions GA Wall Mounted Casing Type CC3



These instructions tell you about installing GA Wall Mounted Casing Type CC3. Please read these instructions before using this product. If there is anything you do not understand or if you want to know more about this item, please contact GA.

GA wall mounted casings must be installed by suitably qualified contractors with the required knowledge and expertise. Current standard construction methods must be used.

The contractor has the responsibility and duty to ensure proper safety so that during and after completion of the installation the column casing remains firmly fixed in situ.

Before beginning installation also refer to GA Sitework Data Sheet for guidance on Off-loading, Site Storage and Installation.

Step 1: Carefully unpack the wall mounted casing panels.

Step 2: Inspect the casing panels to ensure these are undamaged.


Step 3: Position and fit continuous angle fixing brackets 'A' to the existing structure (no. 8 size fixings supplied by others).


Step 4: Position pre-drilled casing flange 'B' over continuous angle fixing brackets 'A'. Using the pre-drilled holes as a guide, drill 3mm dia. pilot holes.

Step 5: Screw-fix the casing 'B' back to the continuous angle fixing brackets 'A', using the provided csk. self tapping screws.

NB GA wall mounted casings supplied by Gooding Aluminium are not intended to have electrical wiring installed. Where this is a requirement the specifier and installer should ensure that all Regulations have been complied with and in particular that consideration has been given to the CENELEC HD 384 series of documents. (CENELEC HD 384 Series: Electrical Safety in Buildings (20 Parts))

Issue 1:5/08

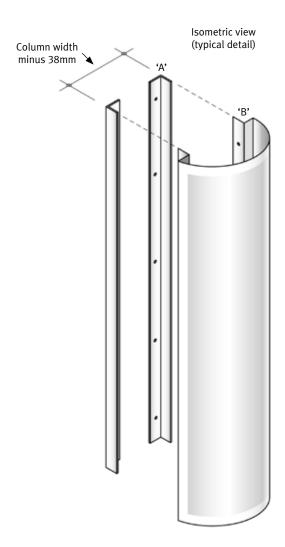

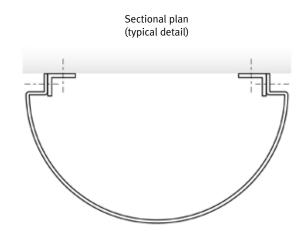

GA Helpline 020 8692 2255 Mon-Fri 8.30am-5pm for professional assistance www.goodingalum.com sales@goodingalum.com