

# Fixing Instructions

## GA Single Folded Trays with GA Panel-Fix Type WC3

These instructions tell you about installing GA Single Folded Trays with GA Panel-Fix Type WC3. Please read these instructions before using this product. If there is anything you do not understand or if you want to know more about this item, please contact GA.

GA Single Folded Trays must be installed by suitably qualified contractors with the required knowledge and expertise. Current standard construction methods must be used.

The installation contractor has the responsibility and duty to ensure proper safety so that during and after completion of the installation the single folded trays remain safely secured to the fixing surface.

Before beginning installation also refer to [GA Sitework Data Sheet](#) for additional guidance on Off-loading, Site Storage and Installation.

Step 1: Carefully unpack the materials.

Step 2: Inspect the folded trays and GA Panel-Fix extrusion to ensure items are undamaged.


Step 3: Ensure the aluminium panels are satisfactorily secured to the infill panel (supplied by others).

Step 4: Secure the GA Panel-Fix extrusion to the rear of the infill panel and the intended fixing surface utilising all of the pre-drilled No.8 size holes (fixings supplied by others).

Step 5: Hang panel(s) by locating the sets of Panel-Fix extrusion into each other.

NB Single Folded Trays supplied by Gooding Aluminium are not intended to have electrical wiring installed. Where this is a requirement the specifier and installer should ensure that all Regulations have been complied with and in particular that consideration has been given to the CENELEC HD 384 series of documents. (CENELEC HD 384 Series: Electrical Safety in Buildings (20 Parts)).

Issue 1:5/08

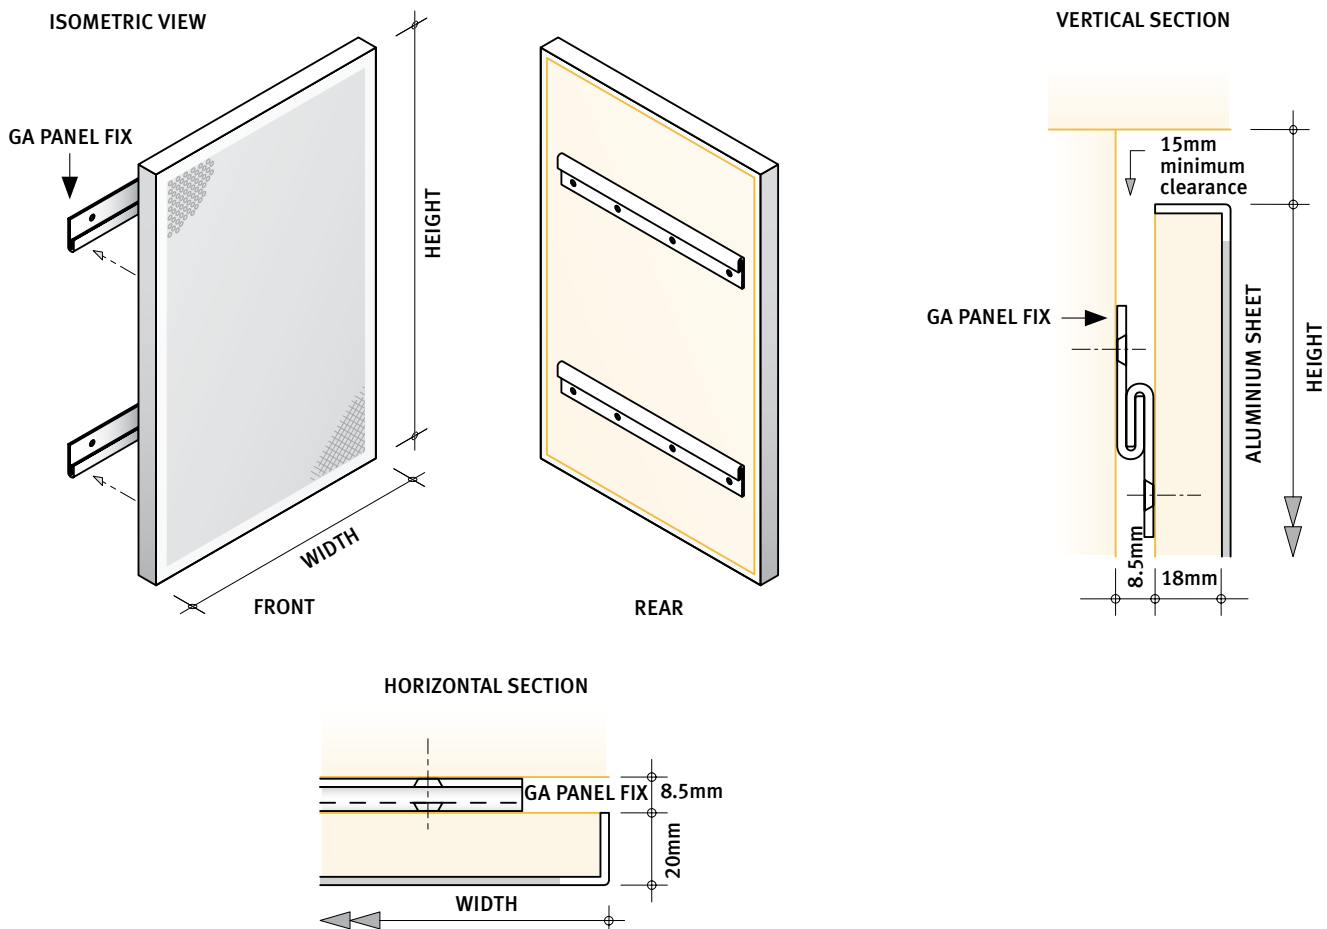

GA Helpline 020 8692 2255 Mon-Fri 8.30am-5pm for professional assistance  
[www.goodingalum.com](http://www.goodingalum.com) [sales@goodingalum.com](mailto:sales@goodingalum.com)

© 2008 Gooding Aluminium Limited