

Fixing Instructions

GA Ceiling Panel Type CP3

These instructions tell you about installing GA Ceiling Panel Type CP3. Please read these instructions before using this product. If there is anything you do not understand or if you want to know more about this item, please contact GA.

GA ceiling panels must be installed by suitably qualified contractors with the required knowledge and expertise. Current standard construction methods must be used.

The ceiling contractor has the responsibility and duty to ensure proper safety so that during and after completion of the installation the suspended ceiling cannot fall down.

Before beginning installation also refer to [GA Sitework Data Sheet](#) for guidance on Off-loading, Site Storage and Installation.

Step 1: Carefully unpack the ceiling panels.

Step 2: Remove the protective rubber caps from the threaded studs and inspect for any signs of damage. If the threaded studs show any signs of damage, do not use the panel and immediately contact GA.

Step 3: Attach the L or Z shaped brackets and secure with the supplied nuts and washers.


Step 4: With a minimum number of 2 persons hang each panel by means of a suitable proprietary suspension system (supplied by others) from each of the suspension brackets.

Step 5: Ensure panel levels by adjusting the suspension system.

NB Suspended ceiling panels supplied by Gooding Aluminium are not intended to have electrical wiring installed. Where this is a requirement the specifier and installer should ensure that all Regulations have been complied with and in particular that consideration has been given to the CENELEC HD 384 series of documents. (CENELEC HD 384 Series: Electrical Safety in Buildings (20 Parts))

Issue 1:5/08

Isometric view from above
(typical detail)

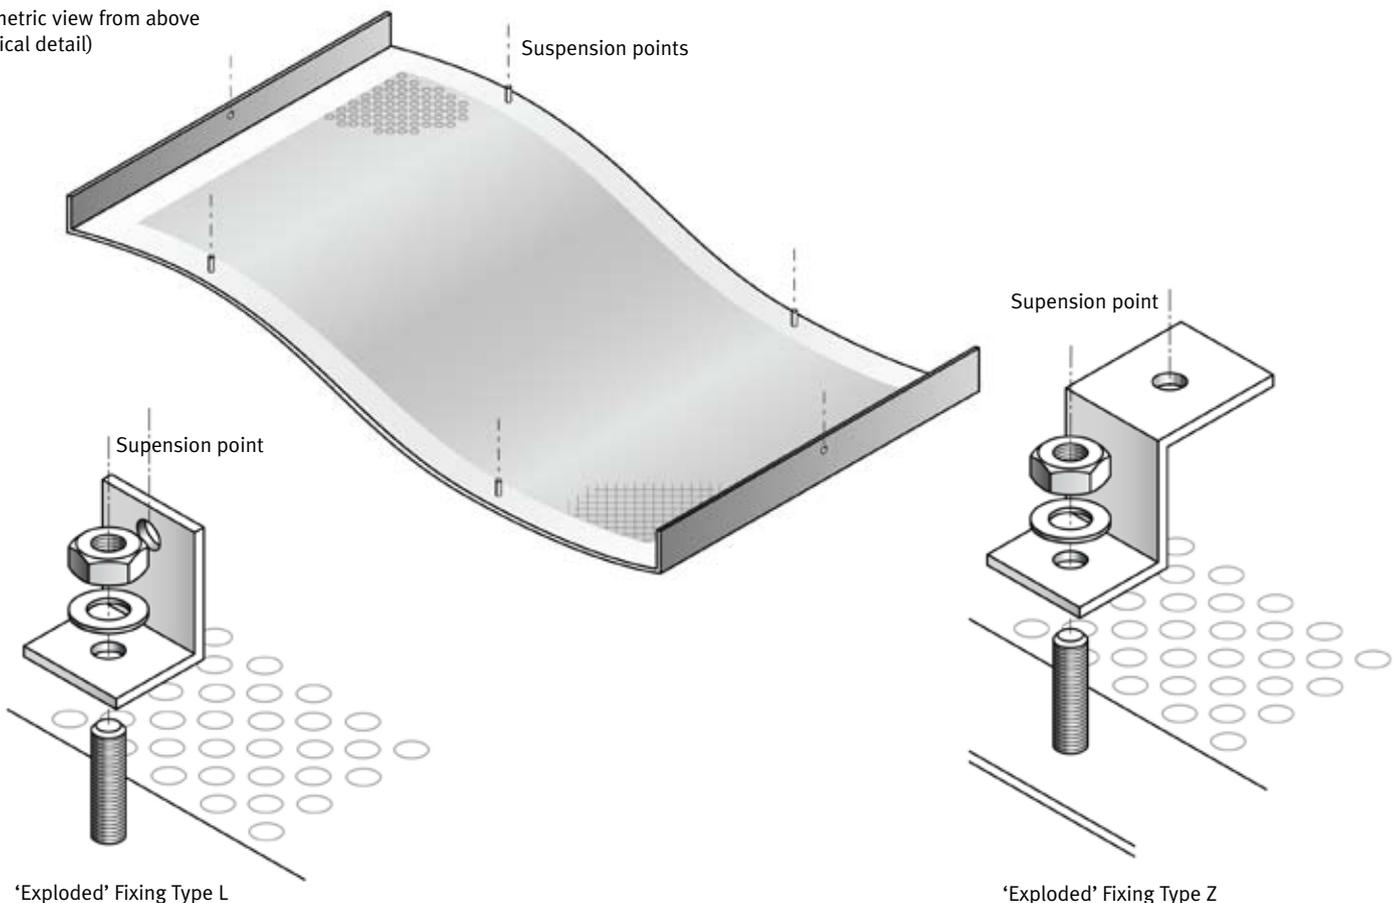

GA Helpline 020 8692 2255 Mon-Fri 8.30am-5pm for professional assistance
www.goodingalum.com sales@goodingalum.com

© 2008 Gooding Aluminium Limited